



FORMULA 922 FLOORING ADHESIVE REMOVER WIPES

Easy-to-Use / Pre-Soaked Wipes / Removes Urethanes

Product Description

Sentinel 922 Flooring Adhesive Remover Wipes are formulated to remove all flooring adhesives, including wet and cured urethanes adhesives from most pre-finished (not waxed) flooring surfaces and tools. Perfect for touching up excess glue and adhesive fingerprints on new installations.

Application Information (Always follow product label instructions for best results)

DIRECTIONS:

FOR USE AS A URETHANE RELEASE AGENT

Step 1: Wipe finished surface (top) of each board with Sentinel 922 Flooring Adhesive Remover Wipes prior to spreading urethane glues to ensure easy clean up of urethane adhesives on finished wood floors. Avoid the tongue and groove or undersides of boards.

Step 2: Clean up excess glue that seeps up between floor boards.

Step 3: Wash the newly installed floor with Sentinel 810 All-Surface Floor cleaner once installation is complete to remove remaining 922.

*Caution: Floor will be extremely slippery with residual 922 on the surface.

GENERAL ADHESIVE REMOVAL :

Step 1: Unscrew container lid, remove and discard seal. Pull up the corner of the towel in the center of the roll, twist to a point and thread through the hole from the underside of the lid. Replace lid and make sure it is tight. Pull up towel and tear at perforation. Close snap-down lid to keep towels from drying out when not in use.

Step 2: Rub area of the floor that has cured or wet adhesive with 922 Wipe.

Step 3: If adhesive has cured for more than 48 hours, lay a 922 Wipe over the cured adhesive and let stand for about 5 minutes. Wipe area clean with a fresh towel.

DIRECTIONS CONTINUED:

Step 4: Once excess adhesive has been removed, wipe entire area with a clean, water-dampened cloth to remove any remaining remover.

Note: Be sure NOT to scrub the surface of the finished wood too aggressively, as this may change the look of the finish, particularly with matte finishes. Do NOT allow excess remover to drip between the floor boards. Close cap when not in use. Store in a clean, dry area.

V.O.C. CONTENT:

This Floor or Wall Covering Adhesive Remover contains less than 5% V.O.C. content by weight, in accordance with the requirements set forth by the California Air Resource Board (CARB) and Ozone Transport Commission (OTC), effective 1-1-2009.

WARRANTY NOTICE:

Seller makes no warranty, expressed or implied, nor accepts any responsibility for any direct or consequential damages beyond purchase price, because seller cannot control users handling and use or effect of that use.

PROPERTIES

Physical state: Liquid soaked wipe

Appearance: Clear

Color: None to amber

Odor: Mild Musty Odor

pH: Not Applicable

Boiling Point: 470° F.

Flash Point: 200° F.

Vapor Pressure: <0.2 mm Hg@68° F.

VOC Content: <500 g/l*

* When determining VOC content in accordance with the requirements set forth by the Ozone Transport Commission (OTC), effective 01-01-2009

HAZARD RATING: HMIS
HEALTH 1
FLAMMABILITY 1
REACTIVITY 0
PERSONAL PROTECTION H




922 FLOORING ADHESIVE REMOVER WIPES

V.O.C. COMPLIANT

SENTINEL 922 FLOORING ADHESIVE REMOVER WIPES

Sentinel 922 Flooring Adhesive Remover Wipes are formulated to remove all flooring adhesives, including wet and cured urethane adhesives from most pre-finished (not-waxed) flooring surfaces and tools.

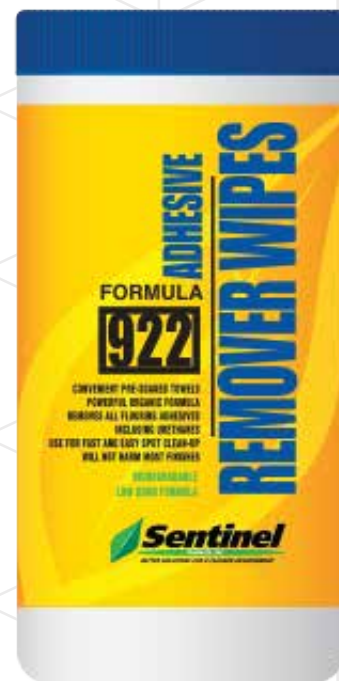

Easy-to-Use / Pre-Soaked Wipes / Removes Urethanes

800-373-0633 or www.senpro.com

Sentinel Products, Inc. / 8901 Wyoming Avenue North, Brooklyn Park, MN 55445